


LightLock

ISC

Dimensions

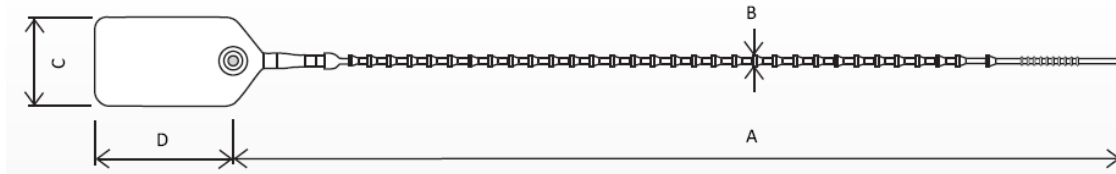

Type	A (mm)	B (mm)	C (mm)	D (mm)
LightLock 220	220	2.6	21.3	33.5

Specifications


Material : Polypropylene
Temperatuur : -20 to 60°C

Tensile Strength : >8kg


Packaging

Product	Carton					
	QTY	L	W	H	V(M³)	Weight kg
LightLock 220	1000	285	285	210	0,017	1.89


Applications

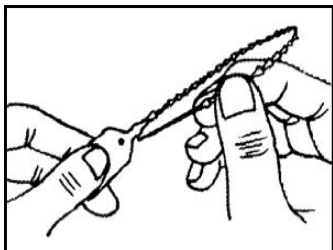

1. Insert strap into locking chamber

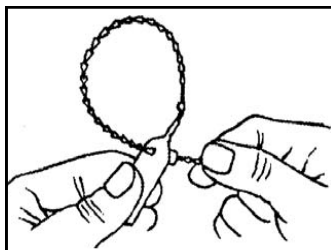

2. Pull tight around object being sealed

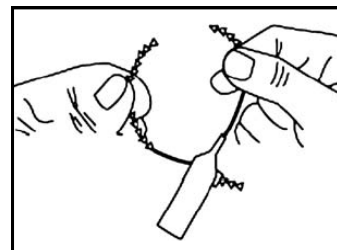

3. Break by hand to remove

Security Seals



INDICATIVE SEALS

TECHNICAL INFORMATION

ISC Security Products

Jhr. Mockkade 27 • 2181 AL HILLEGOM NL

T. +31 252 750480 • E. info@security-seals.global • W. www.security-seals.global